




P.O. Box 2956 · Syracuse · New York · 13220  
 Phone: (315) 433-1150 Fax: (315) 433-1521  
 Toll Free US & Canada (800) 334-0837  
 Email: sales@infitec.com

DISCONTINUED SERIES DISCONTINUED SERIES DISCONTINUED SERIES DISCONTINUED

# C SERIES OPEN BOARD TIME DELAY CONTROL SURFACE MOUNT

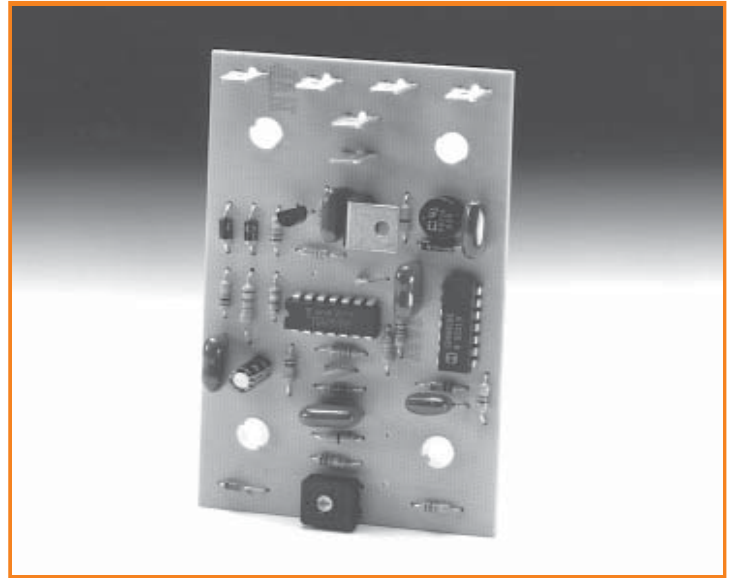

## FEATURES

- C/MOS Digital Circuitry
- Time Delays To 1000 Minutes
- No First Cycle Effect
- Quality Low Cost Construction
- Fully Solid State
- 1/4" Quick Connect Termination
- Low Cost
- Five Different Modes Of Operation
- .5% Repeat Accuracy
- UL/CSA Pending

## SPECIFICATIONS

### 1. Time Delay.

- 1.1 Type: C/MOS digital circuitry
- 1.2 Range: From .05 seconds to 1000 minutes. Fixed delay available (see page B8)
- 1.3 Repeat accuracy:  $\pm 5\%$  under fixed conditions
- 1.4 Setting accuracy:  $\pm 10\%$
- 1.5 Reset time: 100 milliseconds maximum
- 1.6 Recycle time: 100 milliseconds, 50 milliseconds after timing
- 1.7 Time delay vs. voltage and temperature:  $\pm 2\%$

### 2. Input.

- 2.1 Operating voltage: 24, 120 & 230 VAC, 12 & 24/28 VDC
- 2.2 Tolerance:  $\pm 20\%$  of nominal
- 2.3 Frequency: 50 - 60 Hertz

### 3. Output.

- 3.1 Type: Solid state
- 3.2 Form: SPST
- 3.3 Rating: 1 ampere maximum, 10 amperes inrush at 60°C (40mA minimum or consult factory)
- 3.4 Life: 100,000,000 operations minimum under full load

### 4. Protection.

- 4.1 Transient:  $\pm 1500$  volts for 150 microseconds
- 4.2 Polarity: DC units are reverse polarity protected
- 4.3 Dielectric breakdown: 1500 volts RMS minimum

### 5. Mechanical.


- 5.1 Mounting: #6 screw clearance (4 places)
- 5.2 Termination: 3/16" or 1/4" quick connect terminals
- 5.3 Style: Open board/surface mount

### 6. Environmental.

- 6.1 Operating temperature:  $-20^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$
- 6.2 Storage temperature:  $-30^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$


## MODE OF OPERATION - SERIES DELAY ON MAKE - CMS

Upon application of power to the input terminals, the time delay begins. At the completion of the pre-selected time delay, the output contact transfers. Reset is accomplished by removal of input power. There is no false output when reset during timing.

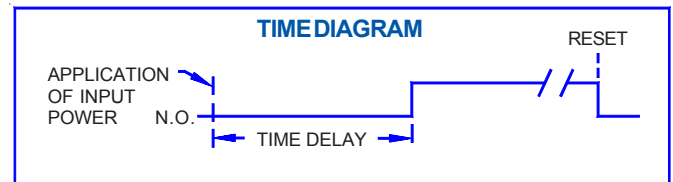


## INTERVAL - CIS

Upon application of power to the input terminals, the output contact immediately transfers and the time delay begins. At the completion of the pre-selected time delay, the output contact reverts to its original position. Reset is accomplished by removal of input power.

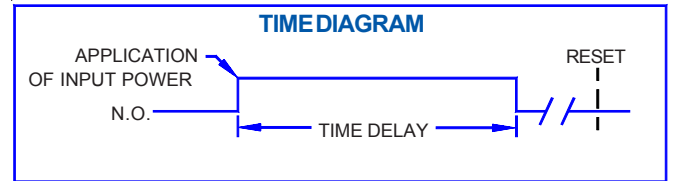

## SINGLE SHOT - CSS

Power must be applied to the input at all times prior to and during timing. Upon closure of the initiate switch (momentary or maintained) the output contact transfers and the time delay begins. At the completion of the pre-selected delay period, the output contact reverts to its original position. Removal of input power will reset the control.

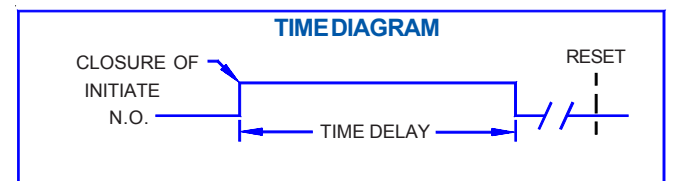



### DELAY ON BREAK - CBS

Power must be applied to the input at all times prior to and during timing. Upon closure of the initiate switch, the output contact transfers and remains transferred if no further action is taken. When the initiate switch is opened, the time delay begins. At the completion of the pre-selected delay period the output contact reverts to its original position. Removal of input power will reset the control.


### RETRIGGERABLE ONE-SHOT - COS

Power must be applied to the input at all times prior to and during timing. Upon closure of the initiate switch (momentary or maintained) the output contact transfers and the time delay begins. At the completion of the pre-selected delay period, the output contact reverts to its original position. **NOTE:** Momentary or maintained closure of initiate switch during timing will reset the time delay.



**DISCONTINUED**

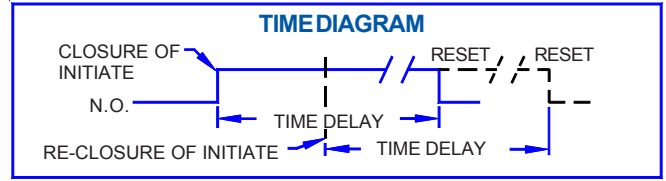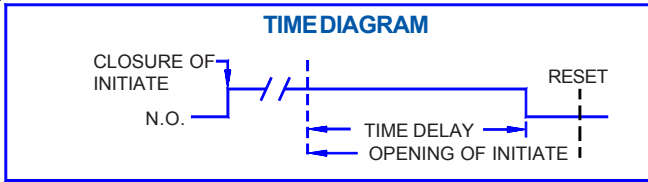

### DIMENSIONS

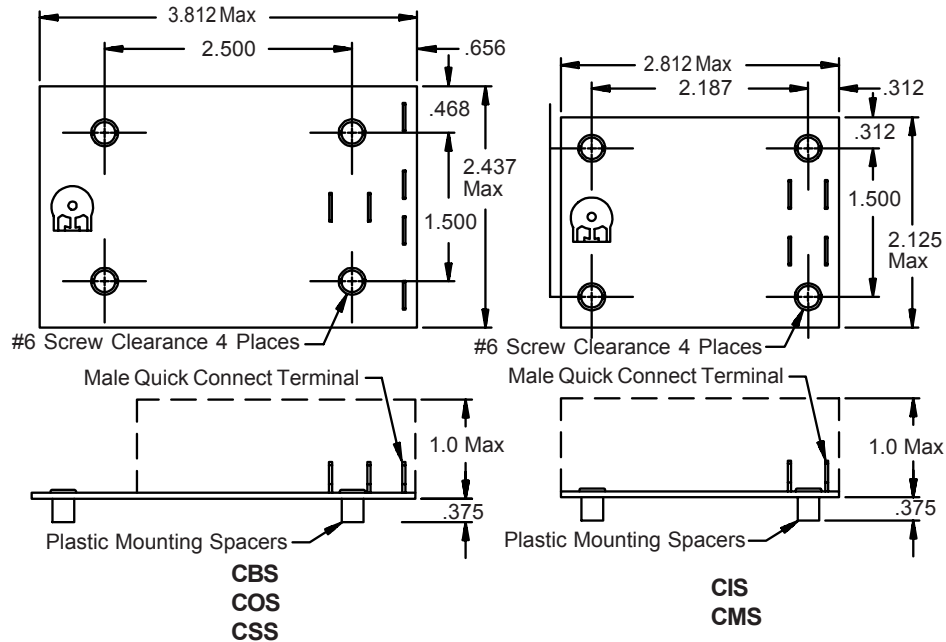

### CONNECTION DIAGRAMS

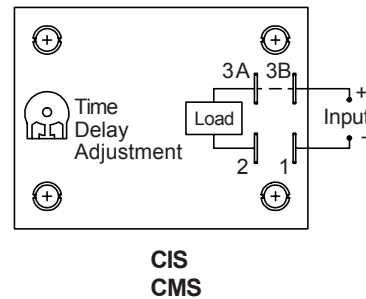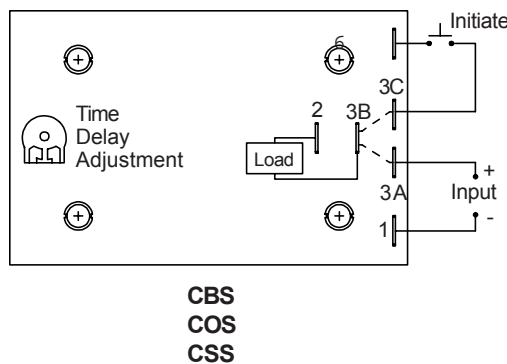

### ORDERING INFORMATION

SERIES	TERMINATION	INPUT VOLTAGE	ADJUSTMENT	TIME DELAY RANGE
CBS CIS CMS COS CSS	2 - 3/16" Quick Connect 3 - 1/4" Quick Connect	1 - 12 VDC 2 - 24/28 VDC 4 - 24 VAC 5 - 120 VAC 6 - 230 VAC	0 - Knob 1 - Fixed	See Time Delay Range Chart