



P.O. Box 2956 · Syracuse · New York · 13220
 Phone: (315) 433-1150 Fax: (315) 433-1521
 Toll Free US & Canada (800) 334-0837
 Email: sales@infitec.com

FEATURES

- C/MOS Digital Circuitry
- Time Delays To 1000 Minutes
- No First Cycle Effect
- Fully Solid State And Encapsulated
- 0.5% Repeat Accuracy
- Six Different Modes Of Operation
- Output Current Ratings To 25 Amp Steady State, 250 Amp Inrush
- Low Cost Mounting And Termination
- Fixed Or Adjustable Time Delays
- UL/cUL Recognized

SPECIFICATIONS

1. Time Delay.

- 1.1 Type: C/MOS digital circuitry
- 1.2 Range: From 0.05 seconds to 1000 minutes.
Fixed delays available
- 1.3 Repeat accuracy: $\pm 0.5\%$ under fixed conditions
- 1.4 Setting accuracy: $\pm 10\%$
- 1.5 Reset time: 50 milliseconds maximum
- 1.6 Recycle time: 100 milliseconds during timing,
50 milliseconds after timing
- 1.7 Time delay vs. voltage and temperature: $\pm 2\%$
- 1.8 External resistance (remote adjust only) : 1 megohm equals maximum delay

2. Input.

- 2.1 Operating voltage: 24, 120 & 230 VAC
- 2.2 Tolerance: $\pm 20\%$ nominal
- 2.3 Frequency: 50 - 60 Hertz

3. Output.

- 3.1 Type: Solid state
- 3.2 Form: SPST
- 3.3 Ratings:
 - A- 6 amp steady state, (60 amp inrush, 200 mA. min.) *
 - B- 10 amp steady state, (100 amp inrush, 225 mA. min.) *
 - C- 15 amp steady state, (150 amp inrush, 250 mA. min.) *
 - D- 2.5 amp steady state, (50 amp inrush, 150 mA. min.) *
 - H- 25 amp steady state, (250 amp inrush, 500 mA. min.) ■
- * Maximum plate temperature: 85°C
- Maximum plate temperature: 60°C

3.4 Life: 100,000,000 operations minimum under full load

4. Protection.

- 4.1 Transient: ± 1500 volts for 150 microseconds
- 4.2 Dielectric breakdown: 1500 volts RMS minimum


5. Mechanical.

- 5.1 Mounting: One #8 or #10 screw
- 5.2 Termination: 1/4" quick connect terminals
- 5.3 Style: Surface mount / encapsulated with heat sink surface *(see dimensional drawing)

6. Environmental.

- 6.1 Operating temperature: -20°C to +80°C
- 6.2 Storage temperature: -30°C to +85°C
- 6.3 Humidity: 95% relative, non-condensing

H SERIES DIGITAL ENCAPSULATED POWER TIME DELAY MODULES

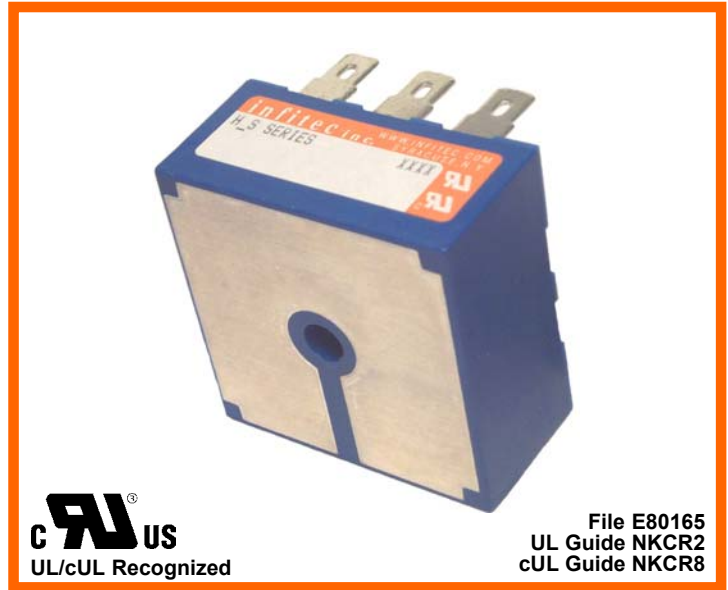


UL
 UL/cUL Recognized

File E80165
 UL Guide NKCR2
 cUL Guide NKCR8

MODE OF OPERATION - SERIES


DELAY ON MAKE - HMS

Upon application of power to the input terminals, the time delay begins. At the completion of the pre-selected time delay, the output contact transfers. Reset is accomplished by removal of input power. There is no false output when reset during timing.

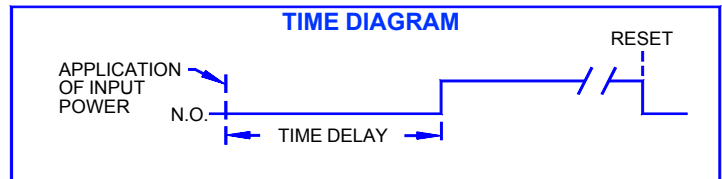


INTERVAL - HIS

Upon application of power to the input terminals, the output contact immediately transfers and the time delay begins. At the completion of the pre-selected time delay, the output contact reverts to its original position. Reset is accomplished by removal of input power.

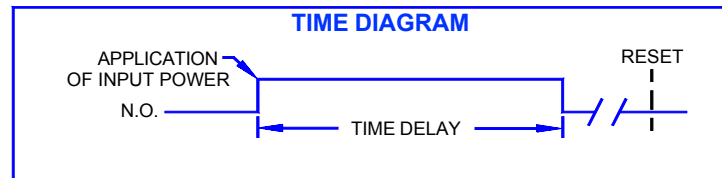


SINGLE-SHOT - HSS

Power must be applied to the input at all times prior to and during timing. Upon closure of the initiate switch (momentary or maintained) the output contact transfers and the time delay begins. At the completion of the pre-selected delay period, the output contact reverts to its original position. Removal of input power will reset the control.

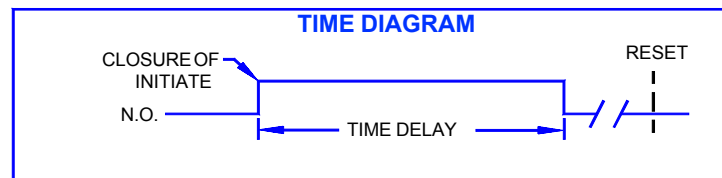

DELAY ON BREAK - HBS

Power must be applied to the input at all times prior to and during timing. Upon closure of the initiate switch, the output contact transfers and remains transferred if no further action is taken. When the initiate switch is opened, the time delay begins. At the completion of the pre-selected delay period the contact reverts to its original position. Removal of input power will reset the control. If the initiate switch is closed during timing, the output remains transferred and the time delay is reset.

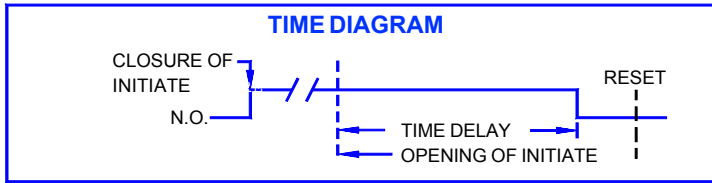


ON/OFF RECYCLE - HRS

Upon application of power to the input terminals, the ON time delay begins and the output contact transfers. Upon completion of the ON time delay, the output contact reverts back to its original position and the OFF time delay begins. Upon completion of the OFF delay, the output contact again transfers and the cycle repeats. Reset is accomplished by removal of input power.


OFF/ON RECYCLE - HRS

This is the inverse of ON/OFF RECYCLE above, and diagram below.

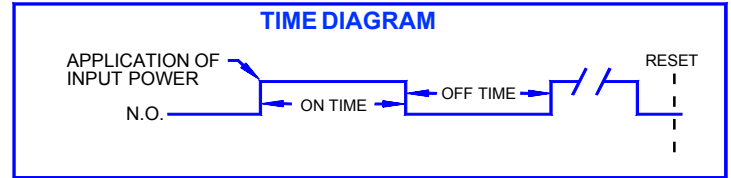


TRAILING EDGE TRIGGERED - HTS

Power must be applied to the input at all times prior to and during timing. Upon closure of the initiate switch, nothing happens. When the initiate switch is opened, the time delay begins and the output contact transfers. At the completion of the pre-selected delay period the contact reverts to its original position. Removal of input power will reset the control. If the initiate switch is closed during timing, the output contact reverts to its original position and the time delay is reset.

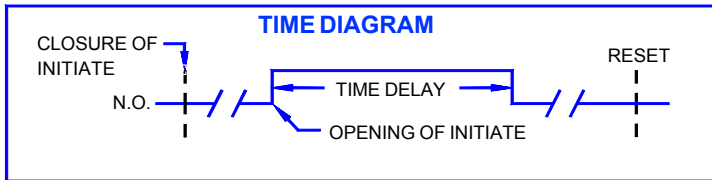


CONNECTION DIAGRAMS

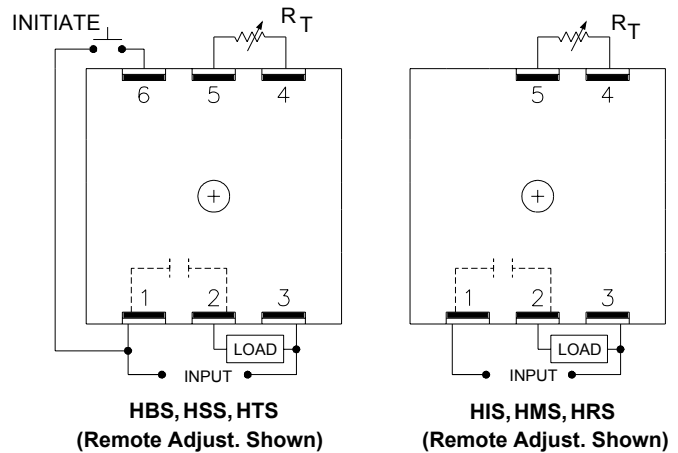

HBS, HSS, HTS
(Remote Adjust. Shown)

HIS, HMS, HRS
(Remote Adjust. Shown)

DIMENSIONS

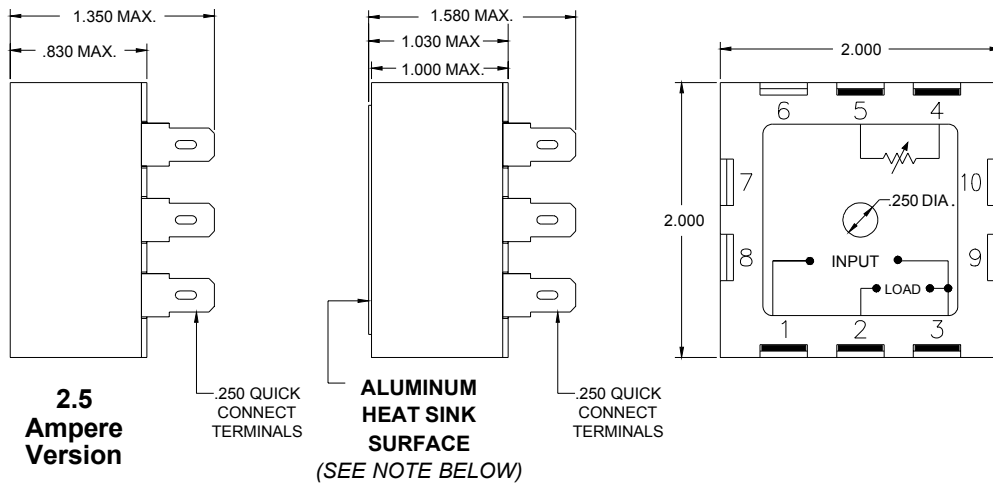

2.5
Ampere
Version

ALUMINUM
HEAT SINK
SURFACE
(SEE NOTE BELOW)

6, 10, 15 & 25 Ampere Versions

NOTE:

For maximum current rating the unit's metal backing must be installed against an aluminum surface of at least 1/16" thickness. A suitable thermal compound should be applied to the unit's metal surface prior to mounting. Refer to Application Note #AN1001 HEATSINKING HIGH CURRENT SOLID STATE CONTROLS

ORDERING INFORMATION

SERIES	INPUT VOLTAGE	OUTPUT RATING	ADJUSTMENT	TIME DELAY RANGE	
HBS HIS HMS HRS HSS HTS	4 - 24 VAC 5 - 120 VAC 6 - 230 VAC	A - 6 Amp B - 10 Amp C - 15 Amp D - 2.5 Amp H - 25 Amp	0 - Local Adjust 1 - Fixed 2 - Remote Adjust	See Time Delay Range Chart	
HRS SERIES ONLY				CYCLE	TIME DELAY
				1 - On Time First 2 - Off Time First	See Time Delay Range Chart. Note: 1st & 2nd delays are equal.