



P.O. Box 2956 · Syracuse · New York · 13220
 Phone: (315) 433-1150 Fax: (315) 433-1521
 Toll Free US & Canada (800) 334-0837
 Email: sales@infitec.com

CDIR SERIES DIGITAL PLUG-IN TIME DELAY RELAY



UL
 UL/cUL Recognized

File E80165
 UL Guide NKCR2
 cUL Guide NKCR8

FEATURES

- C/MOS Digital Circuitry
- Time Delays To 1000 Minutes
- No First Cycle Effect
- 0.5% Repeat Accuracy
- 2% Stability Over Voltage And Temperature
- Wide Voltage Selection 24-230 VAC, 12 - 110 VDC

SPECIFICATIONS

1. Time Delay.

- 1.1 Type: C/MOS Digital Circuitry
- 1.2 Range: From 0.05 seconds to 1000 minutes. Fixed delays available (see time delay range chart)
- 1.3 Repeat accuracy: $\pm 0.5\%$ under fixed conditions
- 1.4 Setting accuracy: $\pm 10\%$
- 1.5 Reset time: 100 milliseconds maximum
- 1.6 Recycle time: 150 milliseconds
- 1.7 Time delay vs. voltage and temperature: $\pm 2\%$

2. Input.

- 2.1 Operating voltage: 24, 120 & 230 VAC, 12, 24 & 110 VDC
- 2.2 Tolerance: $\pm 20\%$ of nominal
- 2.3 Frequency: 50 - 60 Hertz

3. Output.

- 3.1 Type: Electromechanical relay
- 3.2 Form: DPDT
- 3.3 Rating: 10 amperes resistive @ 30 VDC, 120/240 VAC
- 3.4 Life: Electrical - full load - 1,000,000 operations
 Mechanical - 10,000,000 operations

4. Protection.

- 4.1 Transient: ± 1500 volts for 150 microseconds
- 4.2 Polarity: DC units are reverse polarity protected
- 4.3 Dielectric breakdown: 1500 volts RMS minimum

5. Mechanical.

- 5.1 Mounting: Plug-in
- 5.2 Termination: Octal (8 pin), Magnal (11 pin) or 11 pin stab/square base plug-in


6. Environmental.

- 6.1 Operating temperature: -20°C to $+80^{\circ}\text{C}$
- 6.2 Storage temperature: -30°C to $+85^{\circ}\text{C}$
- 6.3 Humidity: 95% relative, non-condensing


MODE OF OPERATION

DELAYED INTERVAL


Upon application of power to the input terminals, the **OFF** delay begins. Upon completion of the **OFF** delay, the output contacts transfer and the **ON** delay begins. Upon completion of the **ON** delay, the output contacts revert to their original position. Reset is accomplished by removal of input power.

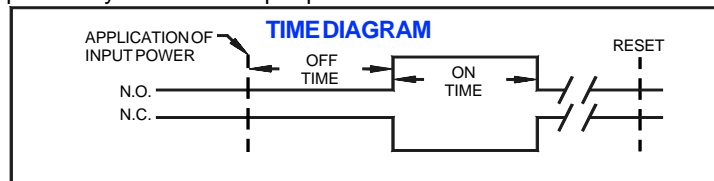


DIMENSIONS

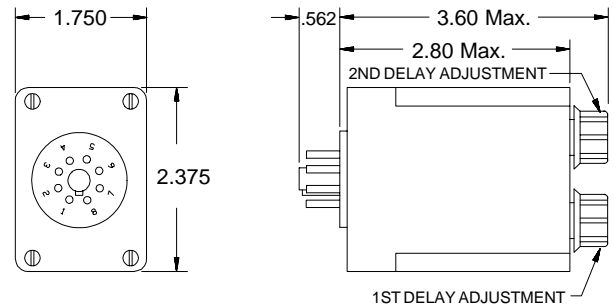


CONNECTION DIAGRAMS



8 - PIN



11 - PIN



STAB / SQUARE

ORDERING INFORMATION

SERIES	BASE STYLE	INPUT VOLTAGE	ADJUSTMENT	1ST TIME RANGE	2ND TIME RANGE
CDIR	1 - Octal Plug-In (8 Pin)	1 - 12 VDC	0 - Knob 1 - Fixed	See Time Delay Range Chart	
	2 - 11 Pin Plug-In	2 - 24/28 VDC			
	3 - 11 Pin Stab/Square Base	3 - 110 VDC			
		4 - 24 VAC			
		5 - 120 VAC			
		6 - 230 VAC			