



P.O. Box 2956 · Syracuse · New York · 13220
 Phone: (315) 433-1150 Fax: (315) 433-1521
 Toll Free US & Canada (800) 334-0837
 Email: sales@infitec.com

DISCONTINUED SERIES DISCONTINUED SERIES DISCONTINUED SERIES DISCONTINUED

QLS SERIES ENCAPSULATED DELAY ON BREAK ANTI-SHORT CYCLE

FEATURES

- Lock Out Delay Starts With Opening of Thermostat or Loss of Power
- 24 Volts AC Normal Operation
- 19 Volts AC or Less Brown-Out Protection Prevents Low Voltage Start Up
- Anticipator Compensation Circuitry Prevents Anticipator From Effecting Normal Operation
- Eliminates Rapid Cycling of Compressors And Relay Chatter
- Fixed or Adjustable Delays

SPECIFICATIONS

- 1. Time Delay.**
 - 1.1 Type: Analog
 - 1.2 Range: 0.1 to 5 mins. adjustable, 2,3 or 5 min. fixed
 - 1.3 Repeat accuracy: $\pm 2\%$
 - 1.4 Reset time: 100 milliseconds
- 2. Input.**
 - 2.1 Operating voltage: 24 VAC
 - 2.2 Frequency: 50 - 60 Hertz
- 3. Output.**
 - 3.1 Type: Solid state
 - 3.2 Form: SPST
 - 3.3 Rating: 1.0 ampere (40mA minimum or consult factory) 10 amperes inrush
 - 3.4 Life: 100,000,000 operations minimum under full load
- 4. Protection.**
 - 4.1 Transient: ± 1500 volts for 150 microseconds
 - 4.2 Dielectric breakdown: 1500 volts RMS minimum
- 5. Mechanical.**
 - 5.1 Mounting: One #8 or #10 screw
 - 5.2 Termination: 1/4" quick connect
 - 5.3 Style: Surface mount / encapsulated
- 6. Environmental.**
 - 6.1 Operating temperature: -20°C to $+60^{\circ}\text{C}$
 - 6.2 Storage temperature: -40°C to $+85^{\circ}\text{C}$
 - 6.3 Humidity: 95% relative, non-condensing


MODE OF OPERATION DELAY ON BREAK - ANTI-SHORT CYCLE

Power is applied when the thermostat closes and the compressor immediately energizes. When the thermostat opens, at the end of each cycle, a lockout delay begins which prevents the compressor relay from re-energizing. If the thermostat is closed, after the time delay is completed, the compressor relay will energize. In case of a momentary loss of power, the lockout will begin, preventing the compressor relay from closing for the duration of the delay.


- Prevents rapid cycling or chatter of compressor contactors in cooling, heat pump, and refrigeration systems.
- Allows head pressure to equalize before a start



DIMENSIONS

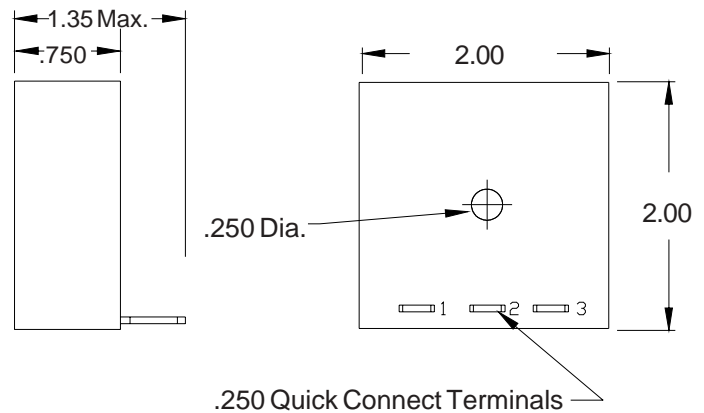

CONNECTION DIAGRAM

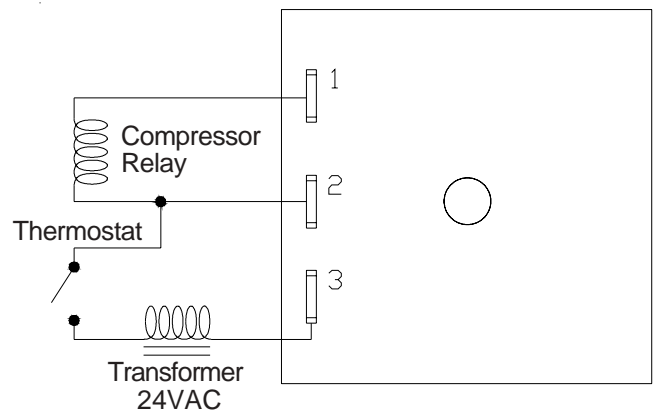

ORDERING INFORMATION

SERIES	TIME DELAY
QLS24	A - 0.1 to 5 Minutes Adjustable -2 - 2 Minutes Fixed -3 - 3 Minutes Fixed -5 - 5 Minutes Fixed